
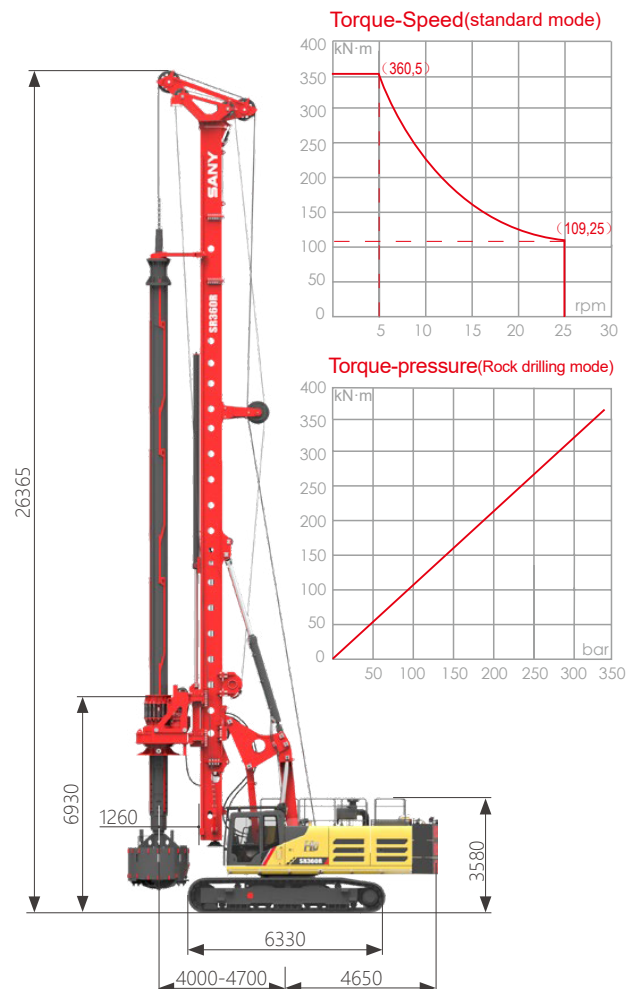


Main performances	Unit	Parameter	Remark
<b>Pile</b>			
Max. drilling diameter	mm	2500	
Max. drilling depth	m	100/65	①
<b>Rotary drive</b>			
Rated output torque	kN·m	360	
Rotation speed	rpm	5~25	
<b>Crowd system</b>			
Crowd force	kN	290	
Line pull	kN	335	
Stroke	mm	6000	
<b>Main winch</b>			
Lifting capacity	kN	360	
Wire rope diameter	mm	36	
Max. line speed	m/min	75	
<b>Auxiliary winch</b>			
Lifting capacity	kN	90	
Wire rope diameter	mm	20	
Max. line speed	m/min	70	
<b>Mast inclination</b>			
Forward/backward	°	5/90	
Lateral	°	±3	
<b>Main Chassis</b>			
Base engine	/	6WG1	ISUZU
Engine power	kW/rpm	300/1800	
Exhaust emission	/	China Stage III	
Engine displacement	L	15.68	
Extension width	mm	4860	
Track shoe width	mm	800	
Swing radius	mm	4705	
<b>Overall machine</b>			
Overall height	mm	26365	
Operating weight	t	120	
Transport width	mm	3530	
Transport height	mm	3745	
Transport length	mm	19910	

①: friction kelly depth / interlocking kelly depth

Kelly bar	Weight(Kg)	Depth(m)	Option	
Inter-locking kelly	Φ530×3×15	13700	40	Standard
	Φ530×4×17	16500	61	
	Φ530×4×18	17300	65	
Friction kelly	Φ530×6×17	17400	94	
	Φ530×6×18	18300	100	

Note: SANY drill pipe can be customized according to actual demand.

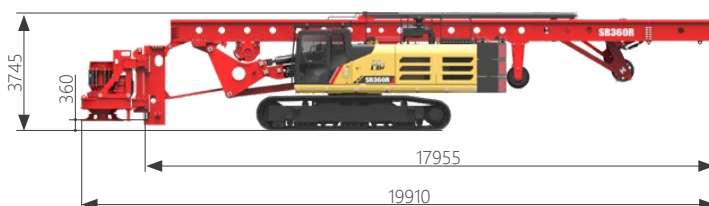

### HIGH EFFICIENCY, ROCK DRILLING EXPERT

SR360R is suitable for housing, bridge and other medium and large pile foundation engineering. With great comprehensive performance, it is an expert at drilling large and deep hole.

**High rock drilling ability:** it is designed for rock drilling conditions with high standard. With large torque and crowd force, it can easily break the rock with hardness above 60MPa.

**Strong power:** the power is distributed in real time and can be output continuously to meet the rock drilling conditions. It can also improve efficiency to reduce fuel loss and fuel cost.

**Stable and reliable:** adopt box structure on mast and derricking mechanism, which has strong load bearing ability; the telescopic undercarriage with large width and low gravity center provides high stability during construction.

**Single layer drum:** only single layer wire rope winding on main winch drum for interlocking wire, no extrusion wear between the ropes, long service life, low cost.

**Intelligent control:** HD touch screen, fast response, easy to operate; five automation functions, reduce operation intensity and fatigue; the EVI APP supports remote real-time monitoring, one-click service call and group management. Locking device display function is optional.

**Convenient maintenance:** the counterweight consists of several parts, secured with pins and free of adjusting and looseness. It is also easy for assembly and disassembly. Equipped with central lubrication, saves time and effort.