

HP20 - 2" HIGH HEAD FIRE FIGHTING PUMP

-  SINGLE IMPELLER
-  DIESEL TRANSFER
-  FIRE FIGHTER
-  MINESITE SPEC AVAILABLE





-  Triple Outlet
1x 2" & 2x 1"
-  Single Outlet
1x 2"



Features:

- 2" Suction
- 1x2" & 2x1" Discharge
- 500LPM Discharge Capacity
- 94PSI / 65M Max Head
- Anodised Aluminium Casing
- Silicon Carbide Mechanical Seal
- Easy Carry Frame

Below: Diesel Model

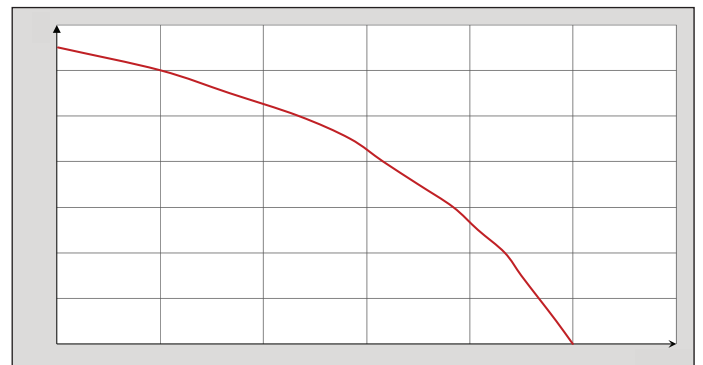

Specifications

Model	HP20 GP200	HP20 GX200	HP20 KP40	HP20 KP60	HP20 L48
Outlet Size	3 Way Outlet	3 Way Outlet	3 Way Outlet	3 Way Outlet	3 Way Outlet
Inlet Size	50mm (2")	50mm (2")	50mm (2")	50mm (2")	50mm (2")
Speed	3400 RPM	3400 RPM	3400 RPM	3400 RPM	3400 RPM
Max Flow	500 LPM	500 LPM	500 LPM	500 LPM	500 LPM
Max Head	65M (94PSI)	65M (94PSI)	65M (94PSI)	65M (94PSI)	65M (94PSI)
Suction	7M	7M	7M	7M	7M
Engine Model	Honda GP200	Honda GX200	Kipor KP40	Kipor KP60	Yanmar L48
Max Output	5HP	6.5HP	4.0HP	6.0HP	4.8HP
Fuel Tank (Lt)	3.1 (approx 2hr)	3.1 (approx 2hr)	2.5 (approx 2hr)	3.5 (approx 2hr)	2.4 (approx 2hr)
Starting System	Recoil Start	Recoil Start (Electric Start Optional)	Recoil Start	Electric Start	Recoil Start (Electric Start Optional)
Weight (Kg)	29	29	39	47	39

Please Note: For long hours of running, we recommend using the GX engine & Yanmar options



1300 BROOKS (276 657)
@ sales@brookshire.com.au
www.brookshire.com.au

BROOKS HIRE

"Better Being With Brooks"