BROOKS
ACCESS

Phone: 1300 276 657
Email: sales@brooksaccess.com.au
www.brooksaccess.com.au

AS/NZS 4801 BUREAU VERITAS Certification
ISO 9001 BUREAU VERITAS Certification
ISO 14001 BUREAU VERITAS Certification

"Better being with Brooks"

BROOKS ACCESS

1300 BROOKS (276 657)
sales@brooksaccess.com.au
brooksaccess.com.au

AS/NZS 4801 BUREAU VERITAS Certification
ISO 9001 BUREAU VERITAS Certification
ISO 14001 BUREAU VERITAS Certification

PERTH
(Brooks Access Head Office)
45 Murray Road North
Welshpool WA 6106

PERTH
(Brooks Hire Head Office)
30 Coulson Way
Canning Vale WA 6155

PERTH
(Brooks Equipment Head Office)
39 Murray Road North
Welshpool WA 6106

SYDNEY
3 Glossop Street
St Marys NSW 2760

MELBOURNE
610 Geelong Road
Brooklyn VIC 3012

BRISBANE
2355 Ipswich Road
Oxley QLD 4075

ADELAIDE
525 South Street
Regency Park SA 5010

DARWIN
402 Stuart Highway
Winnellie NT 0820

BUNBURY
3 Richter Road
Davenport WA 6230

KALGOORLIE
2-4 Williams Street
West Kalgoorlie WA 6430

PORT HEDLAND
1 Manganese Street
Wedgefield WA 6721

NEWMAN
2 Bangkerbang Close
Newman WA 6753

KARRATHA
1 Coolawanyah Road
Karratha WA 6714

TOOWOOMBA
8575 Werrego Highway
Withcott QLD 4352

DALBY
172 Drayton Street
Dalby QLD 4405

MACKAY
27 Barnes Creek Road
Cremorne QLD 4740

PORT AUGUSTA
70 Victoria Parade
Port Augusta SA 5700

ALBANY
140 Chester Pass Road
Lange WA 6330

WHO ARE BROOKS ACCESS?

Brooks Access specialise in the hire and sale of access equipment.

Brooks Access is a part of the Brooks Hire Group, an Australian family owned and operated business since 1979. With over 40 years experience in construction machinery, we've built a solid reputation of reliability and integrity.

WHAT CAN WE DO FOR YOU?

QUALITY ASSURANCE

- ISO & Australian Standards in Quality Management, Health & Safety, and Environmental Management.

NEW EQUIPMENT

- We have the capacity to purchase brand new equipment as our clients require it.
- Growing range of equipment such as Articulated Boom Lifts, Scissor Lifts, Telescopic Boom Lifts, and Telescopic Handlers.

HIRE AND SALES

- Short term and long term hire available.
- Brand new equipment sales.
- Quality brands such as JLG, Genie, and Haulotte.

SERVICE & PARTS

- Team of specialist Parts Interpreters with a huge range of spare parts kept in store.

TRANSPORT & DELIVERY

- 17 Branches Australia wide. Delivery can be facilitated to any jobsite in Australia.

ARTICULATED BOOM LIFTS

BROOKS ACCESS

1300 BROOKS (276 657)
sales@brooksaccess.com.au
brooksaccess.com.au

34ft Articulated Boom Lift - Electric

GENIE Z-34/22N

Platform Height 40 ft 6 in | 12.52 m
Max Horizontal Reach 22 ft 3 in | 6.78 m
Platform Capacity 500 lbs | 227 kg (unrestricted)
Key Features
1.22m jib boom with 139° working range.
Self levelling platform with hydraulic platform rotation.
Zero tailswing, tilt alarm, and descent alarm.

45ft Articulated Boom Lift - Diesel



JLG 450AJ

Platform Height 45 ft / 13.72 m
Machine Width 5 ft 9 in. / 1.75 m
Platform Capacity 500 lb / 226.80 kg (unrestricted)
Key Features
Accessibility – up and over access, optional jib
Move over uneven surfaces with Automatic Traction Control
Environmentally friendly – zero emissions

45ft Articulated Boom Lift - Rough Terrain

GENIE Z-45 XC

Max Working Height 51 ft 6 in | 15.87 m
Max Horizontal Reach 24 ft 9 in | 7.55 m
Platform Capacity 660 lb / 300 kg (unrestricted)
Key Features
Full-time active oscillating axle helps maintain traction on rough terrain. 4WD and 45% gradeability for superior terrainability.
Dual lifting capacity: unrestricted platform capacity.

51ft Articulated Boom Lift - Rough Terrain

GENIE Z-51/30J RT

Max Working Height 57 ft 8 in | 17.59 m
Max Horizontal Reach 30 ft 9 in | 9.37 m
Platform Capacity 500 lbs | 227 kg (unrestricted)
Key Features
Full-time active oscillating axle helps maintain traction on rough terrain. 4WD and 45% gradeability for superior terrainability.
Dual lifting capacity: unrestricted platform capacity.

62ft Articulated Boom Lift - Rough Terrain

GENIE Z-62/40

Max Working Height 67 ft 11 in | 20.87 m
Max Horizontal Reach 40 ft 9 in | 12.42 m
Platform Capacity 500 lb | 227 kg (unrestricted)
Key Features
Full-time active oscillating axle helps maintain traction on rough terrain. 4WD and 45% gradeability for superior terrainability.
Dual lifting capacity: unrestricted platform capacity.

80ft Articulated Boom Lift - Diesel

JLG 800AJ

Platform Height 80 ft / 24.38 m
Horizontal Outreach 51 ft 10 in. / 15.8 m
Platform Capacity 500 lb / 226.80 kg (unrestricted)
Key Features
Best reach envelope in the industry.
Workstation in the Sky® accessories.
Increased fuel efficiency and reduced emissions.

80ft Articulated Boom Lift - Rough Terrain

GENIE Z-80/60

Max Working Height 84 ft | 25.77 m
Max Horizontal Reach 60 ft | 18.29 m
Platform Capacity 500 lb | 227 kg (unrestricted)
Key Features
Genie® Fast Mast™ system lowers the platform to the ground without having to lower the secondary boom.
Full-time positive traction and full-time 4WD.

80ft Articulated Boom Lift - Diesel

HAULOTTE HA26 RTJ PRO

Platform Height 24.4 m
Horizontal Outreach 17.5 m
Platform Capacity 250 kg (2 person)
Key Features
Solid Rough Terrain tyres.
Large modular basket with dual capacity
Option for 350kg lift capacity.

125ft Articulated Boom Lift - Diesel

JLG 1250AJP

Platform Height 38.30 m / 125.7 ft
Max Horizontal Reach 19.25 m / 63.2 ft
Platform Capacity 230 kg / 507.1 lb (unrestricted)
Key Features
Ground to 38.1 m (125 ft) in 95 seconds.
Best reach envelope in the industry.
Strong 100,000-psi steel and a dual capacity.

135ft Articulated Boom Lift - Rough Terrain

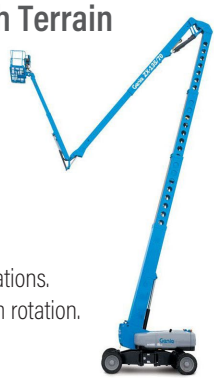

GENIE ZX-135/70

Max Working Height 141 ft | 43.15 m
Max Horizontal Reach 69 ft 9 in | 21.26 m
Platform Capacity 600 lb | 272 kg
Key Features
Ideal for outdoor construction and industrial applications.
360° continuous rotation turntable and 160° platform rotation.
Four-wheel steer and coordinated steer options.

SCISSOR LIFTS

BROOKS ACCESS
1300 BROOKS (276 657)
sales@brooksaccess.com.au
brooksaccess.com.au

19ft Scissor Lift - Electric

JLG ES1932

Platform Height 19 ft / 5.79 m
Machine Width 2 ft 8 in. / 0.81 m
Platform Capacity 507 lb / 229.97 kg

Key Features
Electric drive delivering up to double the battery life.
Self levelling platform with hydraulic platform rotation.
Zero tailswing, tilt alarm, and descent alarm.

19ft Scissor Lift - Electric

JLG R1932

Platform Height 19 ft / 5.80 m
Machine Width 2.7 ft / 0.81 m
Working Height 25.6 ft / 7.80 m

Key Features
Active pothole protection with increased ground clearance.
Fewer parts and an improved battery charger.
All-steel platform & component doors, thicker rubber tires.

26ft Scissor Lift - Electric

JLG R2632

Platform Height 25 ft 6 in. / 7.77 m
Machine Width 2 ft 8 in. / 0.81 m
Working Height 31 ft 6 in. / 9.6 m

Key Features
Industry-exclusive outdoor rating for use up to 21 ft.
Active pothole protection with increased ground clearance.
Fit Through Standard Doorways gives you more access.

26ft Scissor Lift - Electric

GENIE GS-2632

Max Working Height 32 ft 1 in | 9.80 m
Machine Width 2 ft 8 in | 0.81 m
Capacity 500 lb | 227 kg

Key Features
Easy to maneuver in tight spaces.
Large platform workspace - 90cm roll-out platform extension.
User-friendly dual-zone controls for indoor and outdoor use.

32ft Scissor Lift - Electric

JLG ES3246

Platform Height 32 ft / 9.75 m
Machine Width 3 ft 10 in. / 1.17 m
Platform Capacity 705 lb / 319.78 kg

Key Features
Delivers double the battery life.
Leak containment system allows for work on sensitive flooring.
Electric drive and reduced hydraulic components.

32ft Scissor Lift - Electric

JLG R3246

Platform Height 32 ft / 9.75 m
Machine Width 3 ft 10 in. / 1.17 m
Working Height 38 ft / 11.58 m

Key Features
Lightweight with simplified lift system.
Pothole protection for increased ground clearance.
Complies with A92.20 ANSI regulations.

40ft Scissor Lift - Electric

JLG R4045

Max Working Height 45 ft 3 in. / 13.79 m
Machine Width 3 ft 9 in. / 1.14 m
Platform Capacity 770 lb / 349.27 kg

Key Features
Narrow 45 inch width - one of the narrowest widths in its class.
Simple pothole protection system with fewer moving parts.
Built rugged with an all-steel platform and component trays.

26ft Scissor Lift - Rough Terrain

GENIE GS-2669 RT

Max Working Height 32 ft | 9.70 m
Machine Width 5 ft 9 in | 1.75 m
Platform Capacity 1,500 lb | 680 kg

Key Features
Tough construction-oriented four-wheel drive machine.
Up to 45% gradeability for demanding outdoor sites.
Foam-filled, rough-terrain tires.

33ft Scissor Lift - Rough Terrain

GENIE GS-3384

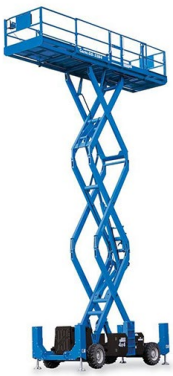

Max Working Height 39 ft | 11.94 m
Machine Width 7 ft | 2.13 m
Platform Capacity 2,500 lb | 1,134 kg

Key Features
Four-wheel drive and positive traction control.
Up to 50% gradeability when driving on slopes.
Equipped with foam-filled, rough-terrain tires.

33ft Scissor Lift - Rough Terrain

GENIE GS-3369 RT

Max Working Height 39 ft | 11.75 m
Machine Width 5 ft 9 in | 1.75 m
Platform Capacity 1,000 lb | 454 kg

Key Features
Four-wheel drive and positive traction control.
Drive and function at full height. 40% gradeability.
Equipped with foam-filled, rough-terrain tires.

SCISSOR LIFTS

BROOKS ACCESS
1300 BROOKS (276 657)
sales@brooksaccess.com.au
brooksaccess.com.au

43ft Scissor Lift - Rough Terrain

GENIE GS-4390

Max Working Height 49 ft | 14.75 m
Machine Width 7 ft 8 in | 2.36 m
Capacity 1,500 lb | 680 kg
Key Features
Built to tackle the most rigorous jobsite conditions.
Up to 50% gradeability when driving on slopes
Foam-filled, rough-terrain tyres.

53ft Scissor Lift - Rough Terrain

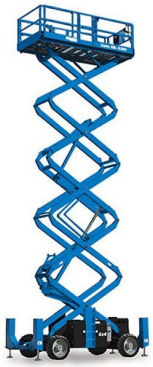

GENIE GS-5390

Max Working Height 59 ft | 17.95 m
Machine Width 7 ft 8 in | 2.36 m
Capacity 1,500 lb | 680 kg
Key Features
4 Wheel drive with positive traction control.
Proportional lift and drive. Up to 50% gradeability.
Foam-filled, rough-terrain tyres.

TELESCOPIC BOOM LIFTS

45ft Telescopic Boom Lift - Rough Terrain

GENIE S-45 XC

Max Working Height 51 ft | 15.72 m
Max Horizontal Reach 36 ft 2 in | 11.02 m
Platform Capacity 660 lb | 300 kg Unrestricted
Key Features
Industry leading dual platform capacity.
Load sense technology for accurate load weighing and zero-load field calibration.

65ft Telescopic Boom Lift - Rough Terrain

GENIE S-65 XC

Max Working Height 71 ft | 21.80 m
Max Horizontal Reach 54 ft 2 in | 16.51 m
Platform Capacity 660 lb | 300 kg Unrestricted
Key Features
Robust jib design to handle increased loads.
Load sense technology for accurate load weighing and zero-load field calibration. Chassis tilt sensor technology.

85ft Telescopic Boom Lift - Rough Terrain

GENIE S-85 XC

Max Working Height 91 ft | 27.91 m
Max Horizontal Reach 74 ft 6 in | 22.71 m
Platform Capacity 660 lb | 300 kg Unrestricted
Key Features
Up to 3 people can work onboard with room for tools and materials.
Load sense technology for accurate load weighing and zero-load field calibration. Chassis tilt sensor technology.

125ft Telescopic Boom Lift - Rough Terrain

GENIE SX-125 XC

Max Working Height 131 ft | 40.1 m
Machine Width 80 ft | 24.38 m
Platform Capacity 660 lb | 300 kg Unrestricted
Key Features
Smooth range of motion envelope — no more saw tooth.
Perfect for heavy lifting in construction, inspections and maintenance.
Designed for compact transportation and work in confined areas.

135ft Telescopic Boom Lift - Rough Terrain

GENIE SX-135 XC

Max Working Height 141 ft | 43.15 m
Max Horizontal Reach 90 ft | 27.43 m
Platform Capacity 660 lb | 300 kg Unrestricted
Key Features
Industry-leading 90 ft (27.43 m) of maximum outreach.
Increased range of motion with 125° of jib articulation.
Load sense technology for accurate load weighing.

150ft Telescopic Boom Lift - Rough Terrain

GENIE SX-150

Max Working Height 157 ft | 48.02 m
Machine Width 80 ft | 24.38 m
Platform Capacity 750 lb | 340 kg
Key Features
Easily position workers and gear with a 10-ft (3.05 m) rotating jib.
Designed to be productive, reliable and easy to transport.
Features a working envelope ideal for the most extreme access jobs.