

**HIGH-PERFORMING  
QUALITY COMPACTION  
EQUIPMENT**



**HUSQVARNA COMPACTION EQUIPMENT**

**LF 60 LAT**

Product Specifications

WEIGHT  
**67 kg**

SPEED  
**25 m / min**

VIBRATING FREQUENCY  
**95 Hz**

ENGINE POWER  
**2.1 kW**





# MAKING ASPHALT TAKE THE PRESSURE

Asphalt can handle extreme temperature variances ranging from  $-30^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$ . Thorough compaction ensures asphalt is coping with the tough conditions. When asphalt has a high void content it can deform due to compaction from vehicles. Low void content makes it unstable and the surface will rut.

Water is especially important when compacting asphalt. Husqvarna's LF range has a removable water tank with an oversized, secure cap to make refills fast, easy and less

frequent. Water consumption is optimized with an easy to reach flow adjustment valve. The water flows without the need of piping that could get clogged or broken.

This specific range of forward plates is ideal for repair jobs and maintenance work, such as driveways, pathways and parking lots. The machines are easy to clean, leave no marks in the asphalt and are able to use whatever water is available on the construction site.



☎ 1300 BROOKS (276 657)

@ [service@brooksequipment.com.au](mailto:service@brooksequipment.com.au)

🌐 [www.brooksequipment.com.au](http://www.brooksequipment.com.au)

**BROOKS**  
EQUIPMENT



# FORWARD PLATE COMPACTORS > ASPHALT AND SOIL



## DAMPING VIBRATION

In addition to the standard handle, all forward plates are equipped with a patented vibration damping handle that lowers the vibration levels below  $2 \text{ m/s}^2$ , allowing for a full day's work.

## SAVING SPACE

Fold the handle to save storage space.

## EASY LIFTING

The machine has a standard lifting eye for crane lifting. It's positioned to keep the machine in balance during lifting. Fork lifting straps available as accessory.

## EASY TRANSPORT

The LAT version features smart integrated transport wheels.

## CUTTING DOWNTIME

The 13-liter corrosion-free water tank is very easy to hook on and off for speedy stops.

## OPTIMIZED WATER FLOW

The easily adjustable water flow provides optimum lubrication between the bottom plate and asphalt.

## NON-STICK BOTTOM PLATE

The bottom plate is specially designed for asphalt work, not getting stuck on hot asphalt or leaving turning marks.

## TUBELESS WATERING

The near maintenance-free patented water distribution system prevents asphalt from sticking to the plate.

HUSQVARNA LF 75 LAT



## HUSQVARNA LF SERIES



LF 100 LAT

LF 80 LAT

LF 75 LAT

LF 60 LAT



📞 1300 BROOKS (276 657)

@ service@brooksequipment.com.au

🌐 www.brooksequipment.com.au

**BROOKS**  
EQUIPMENT







LT 8005, LT 6005,  
LT 5005

LF 130

LF 100

LF 80

LF 50

LX 90

LP 9505

LH 804, LH 700

LG 504

LG 400

LG 300

LG 204

LG 164


LP 6505



or static compaction



or static compaction

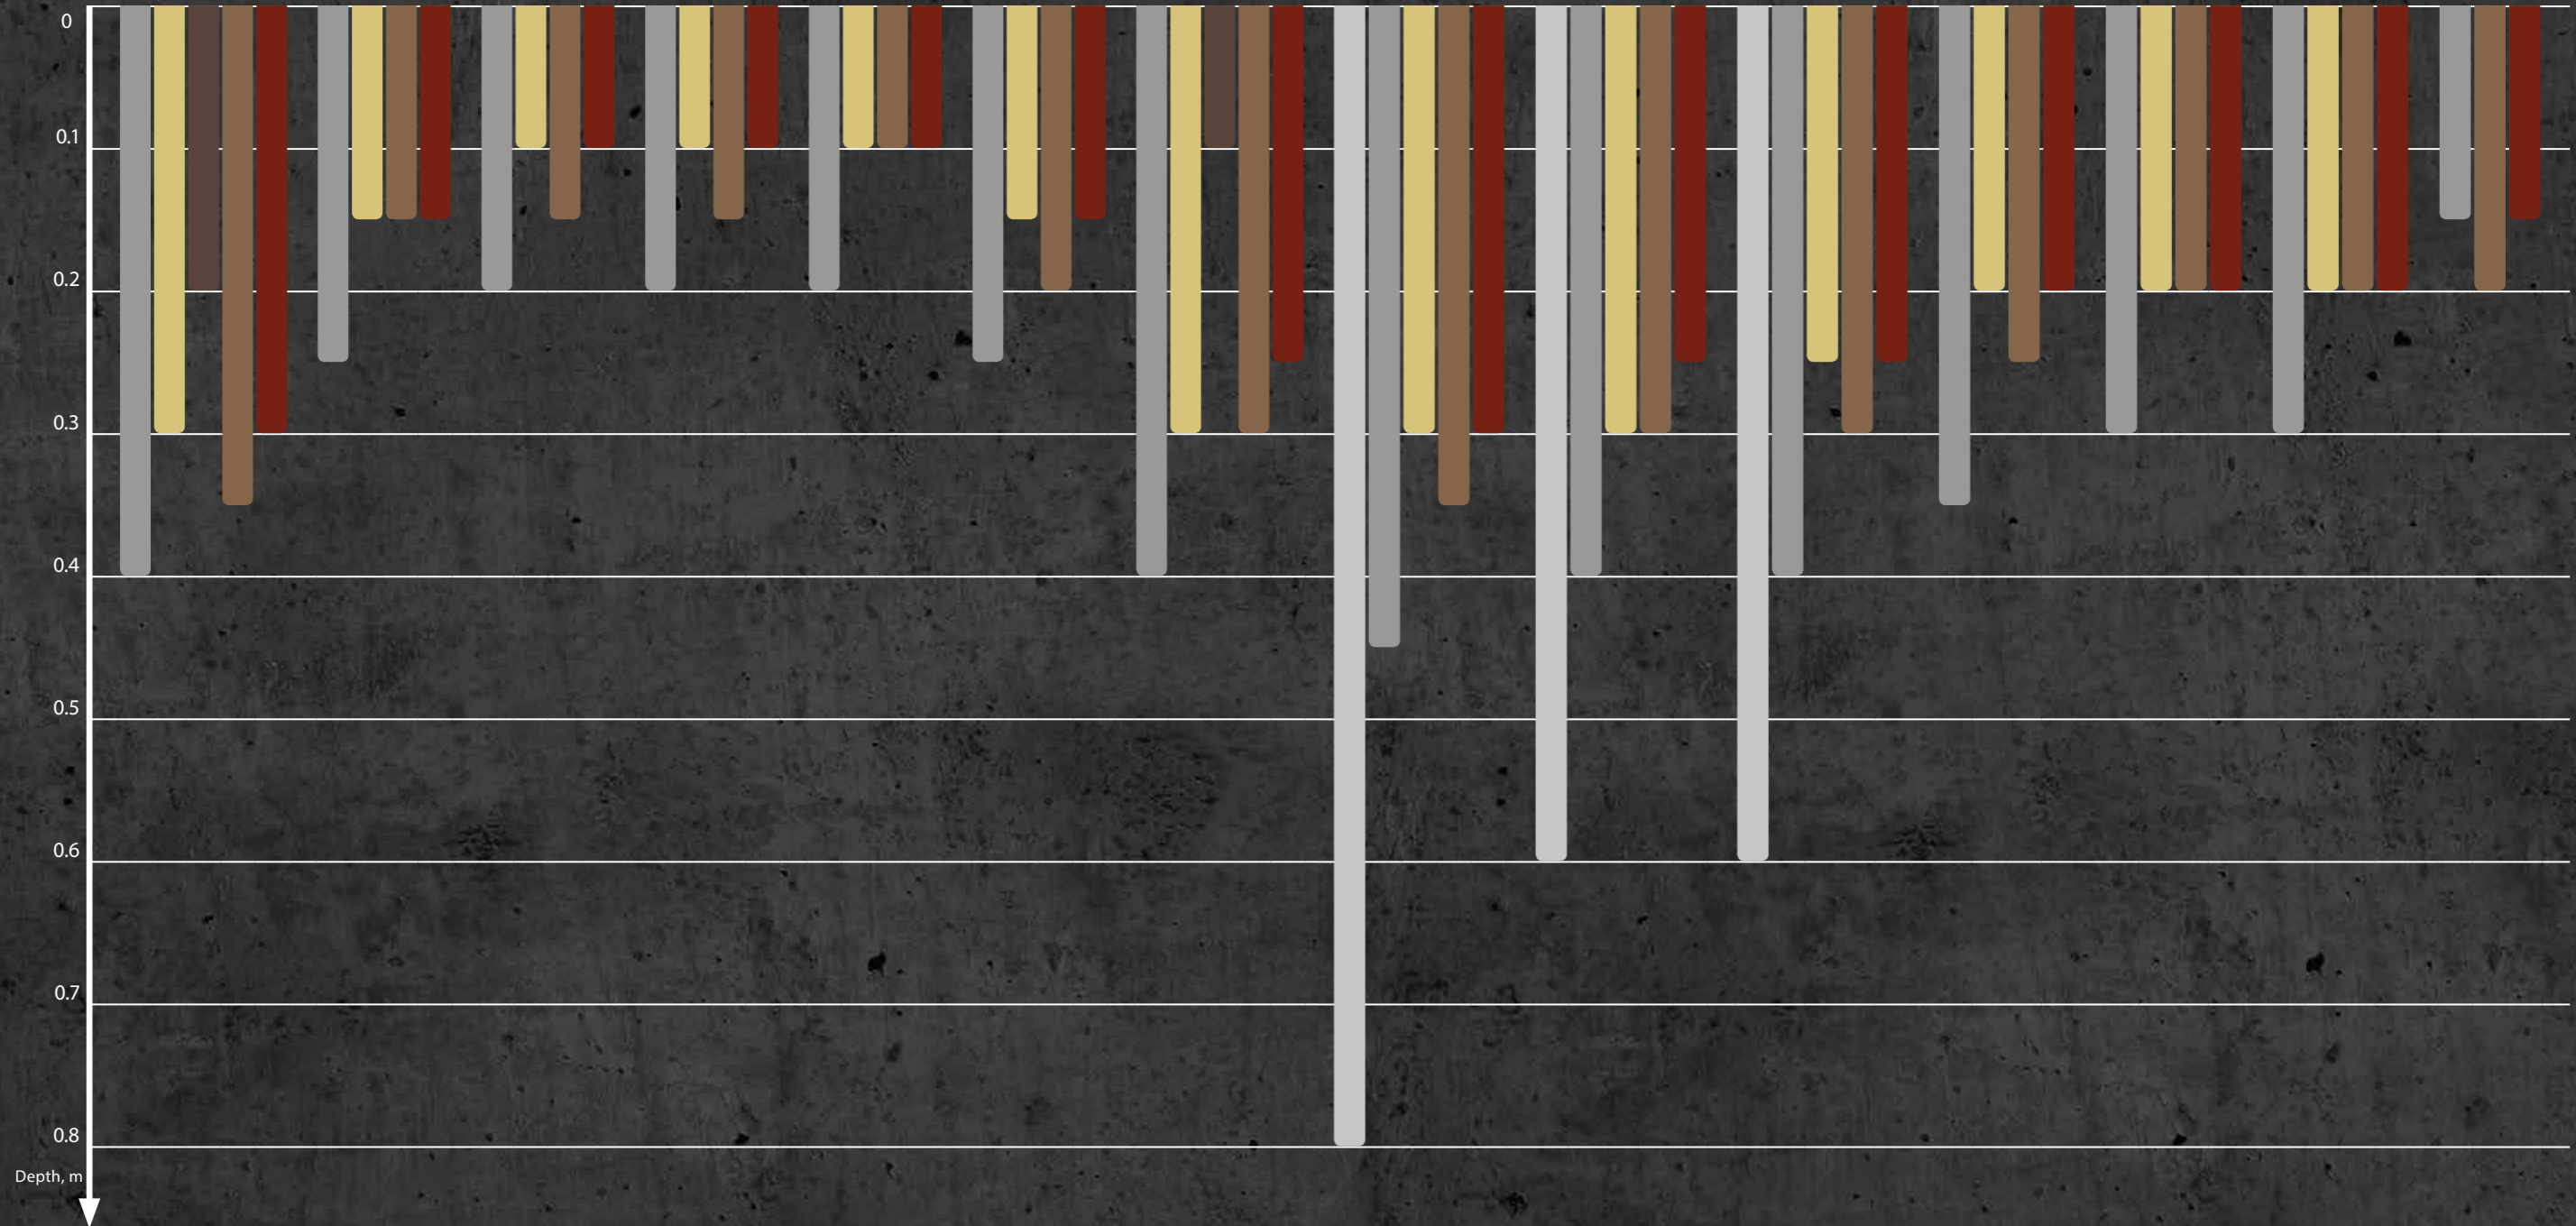

Maximum depth at 4 passes LP rollers at 8 passes.

- Rockfill/macadam
- Sand/gravel
- Silt
- Clay
- Subbase
- Base

All figures are to be considered indicative as soils may vary and impact compaction results.



1300 BROOKS (276 657)  
 @ service@brooksequipment.com.au  
 www.brooksequipment.com.au

**BROOKS**  
EQUIPMENT





**BROOKS**  
EQUIPMENT

📞 1300 BROOKS (276 657)  
@ service@brooksequipment.com.au  
🌐 www.brooksequipment.com.au

**Husqvarna**<sup>®</sup>

*Authorised Dealer in Australia*