

# RT SERIES

DIESEL POWERED ROUGH TERRAIN SCISSOR LIFT



## Performance

Platform Height—Elevated	
RT2669	8.0 m
RT3369	10.0 m
RT4069	12.3 m
RT4769	14.3 m
Platform Capacity	
RT2669	680 kg
RT3369	454 kg
RT4069	363 kg
RT4769	363 kg
— Capacity on Deck Extension	136 kg
No. Occupants (Indoor/Outdoor)	
RT2669	4/4
RT3369	4/2
RT4069	3/2
RT4769	3/2
Lift/Lower Time	
RT2669	36/28 seconds
RT3369	42/33 seconds
RT4069	69/46 seconds
RT4769	81/55 seconds
Maximum Drive Height	Full Height
Weight *	
RT2669	3,900 kg
RT3369	4,350 kg
RT4069	5,015 kg
RT4769	6,420 kg
Drive Speed—Lowered	5.6 km/h
Drive Speed—Elevated	0.8 km/h
Gradeability	
RT2669	40%
RT3369	35%
RT4069	35%
RT4769	30%
Turning Radius (Inside)	2 m
Turning Radius (Outside)	4 m

\* Certain options or country standards will increase weight

## Standard Specifications

### Tyres

- Tyre size (non-marking) 26 x 12 Foam Filled

### Engine

- Diesel Engine Kubota D1305-E4B-J 24.8 hp (18.5 kw)
- Fuel Tank Capacity 38 L
- Drive 4WD Hydrostatic

### Hydraulic System

- Hydraulic Reservoir 50 L



## Standard Features

- Hydraulic Leveling Jacks (Auto Level)
- Roll-out Deck Extension
- 4WD
- Moveable, Removable Platform Console Box
- Nickel Plated Pins, Yellow Zinc-Chromate Plated Fasteners
- Pin-Less Fold Down Rail System
- Platform Control Box with LCD Display, USB Charger and Phone Holster
- Self-closing Self-locking Gate
- Flashing Amber Beacon - LED
- Full Time Traction Control
- Lubrication-Free Scissor Arm Bushings
- Manual Descent
- Oscillating Front Axle
- Scissor Maintenance Prop
- Tie Down Lugs
- 26 x 12 Foam Filled Non-Marking Tyres
- 240V-AC Receptacle In Platform incl. ELCB
- All Motion Alarm
- Descent Alarm
- Horn
- Hourmeter
- Proportional Lift and Drive
- LCD Display with LiftSense System
- Pin-based Load Sensing System
- Telematics-Ready Harness
- AS/NZS 1418.10 Compliant

## Accessories & Options

- White Noise Backup Alarm
- JLG CleanGuard
- Special Hydraulic Fluids
- Special Paint
- ClearSky™
- Heavy Duty Pipe Racks


# RT SERIES

DIESEL POWERED ROUGH TERRAIN SCISSOR LIFT



## Dimensions

All dimensions are approximate.

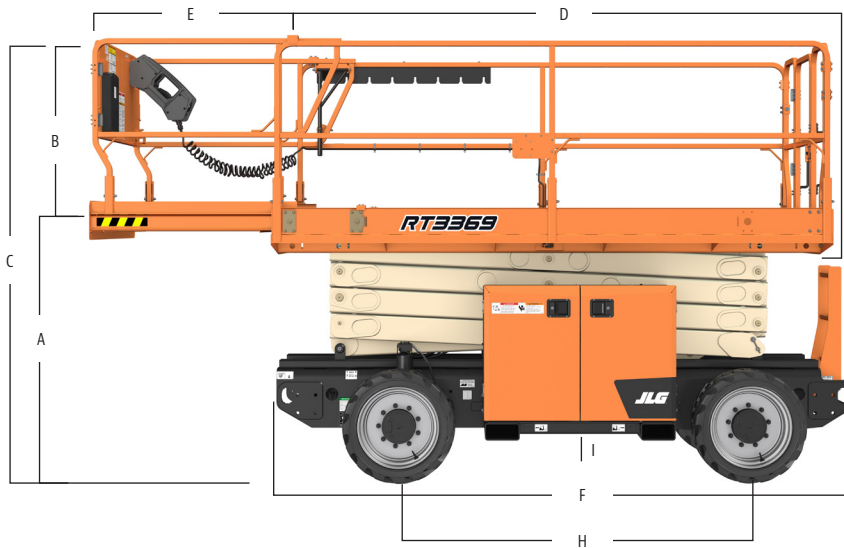

### A. Platform Height – Lowered

RT2669	1.30 m
RT3369	1.46 m
RT4069	1.46 m
RT4769	1.62 m

### B. Platform Railing Height\*

	1.14 m
--	--------

### C. Overall Height

RT2669	
-Rails Up	2.46 m
-Rails Folded	1.89 m
RT3369	
-Rails Up	2.61 m
-Rails Folded	2.05 m
RT4069	
-Rails Up	2.62 m
-Rails Folded	2.05 m
RT4769	
-Rails Up	2.77 m
-Rails Folded	2.21 m

### D. Platform Dimensions

3.3 x 1.6 m

### E. Platform Extension

1.07 m

### F. Overall Machine Length

3.53 m

### G. Overall Machine Width

1.76 m

### H. Wheelbase

2.07 m

### I. Ground Clearance

25.7 cm

**BROOKS**  
ACCESS



☎ **1300 BROOKS** (1300 276 657)

@ sales@brooksaccess.com.au

🌐 www.brooksaccess.com.au