

WEDA S30 (50 Hz)

Product reference

Product code	WEDA S30
Installation	Portable Sludge pump
Discharge connection	3" std, hose, ISO-G or NPT thread
Hydraulic range	N - Normal Head
Solid handling	Max solid handling size 50 mm
Liquid temperature	max 40°C (104°F), standard
Depth of immersion	max 20 m (65 feet)
Liquid density	1100 kg/m ³ (9.2 lb. per US gal.)
pH of the pumped liquid	pH 5–8
Frequency	50 Hz
Insulation class	Class F (+155C), IEC 85
Protection class	IP68
Voltage variation	max ± 5% of nominal voltage
Voltage imbalance	max 2% - between phases
Max start stop	max 30 - No. of starts/hour
Thermal contacts	140°C (284°F)
Cable	Oil and wear resistant rubber cable type HO7RN-F
	1 Ph: 20m 3G2.5 mm ² + plug
	3 Ph: 20m 4G1.5 mm ²
Volute	Rubber lining
Impeller	Cr-alloyed white cast iron, 55±5 HRC
Stator housing	Aluminum
Shaft	Stainless steel
O-rings	Nitrile rubber
Discharge connection	Aluminum
Bearings	Single row ball bearing with C3 clearance
Mechanical seal	Primary seal: Silicon carbide against silicon carbide
	Secondary seal: Lip seal against wear sleeve
	External Plug for Oil Inspection
Quick couplings	3" BSP female Camlock adaptor/coupling/ Storz coupling 75-B
Start type	Built-in capacitor + contactor 1 Ph. Built-in contactor and rotation control for 3 ph
Accessories	Float switch
	Zinc anodes
	Epoxy coating

Weight and dimensions		Normal head
Weight (excl. cable)	kg	25
Height	mm	620
Width	mm	326
Diameter	mm	250




Atlas Copco AB
atlascopco.com



2960 2310 00 - Subject to modifications without prior notice.



Performance curve

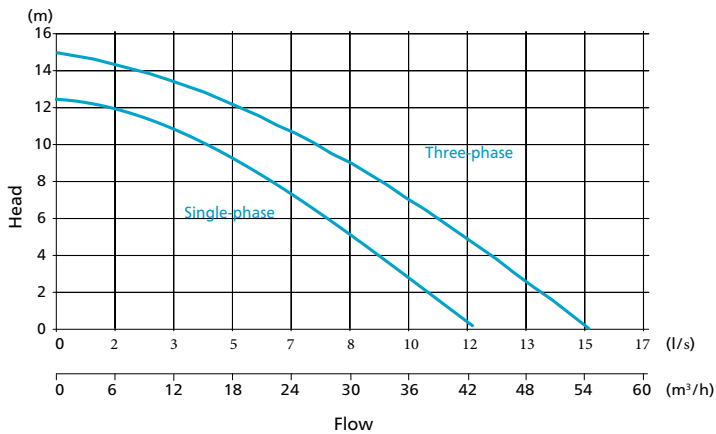

Power rating

Rated power (P2) 2,5 kW		
Voltage	Max. power input kW	Rated current A
230V / 1 Ph	2,2	9,9
230V / 3 Ph	3,1	9,6
400V / 3 Ph	3,1	5,5
500V / 3 Ph	3,1	4,4
690V / 3 Ph	3,1	3,0

Other voltages available on request

